

**INSTALLATION DETAILS (Recommendations only)**


**Concrete footings, 25mPa:**

- Two 300x300x300mm minimum footing size
  - Bolt to footings with 6x M12x75mm Dynabolts or similar
- Concrete core drilling - For extended leg**
- Core drill approx. Ø39mm for SS to 300mm min. depth
  - Set products into footings and fill with concrete

or

**Concrete slab, 25mPa:**

- BR7040-3: One 1100x500x100mm (minimum) thick slab
- BR7040-5: One 1700x500x100mm (minimum) thick slab
- BR7040-7: One 2400x500x100mm (minimum) thick slab

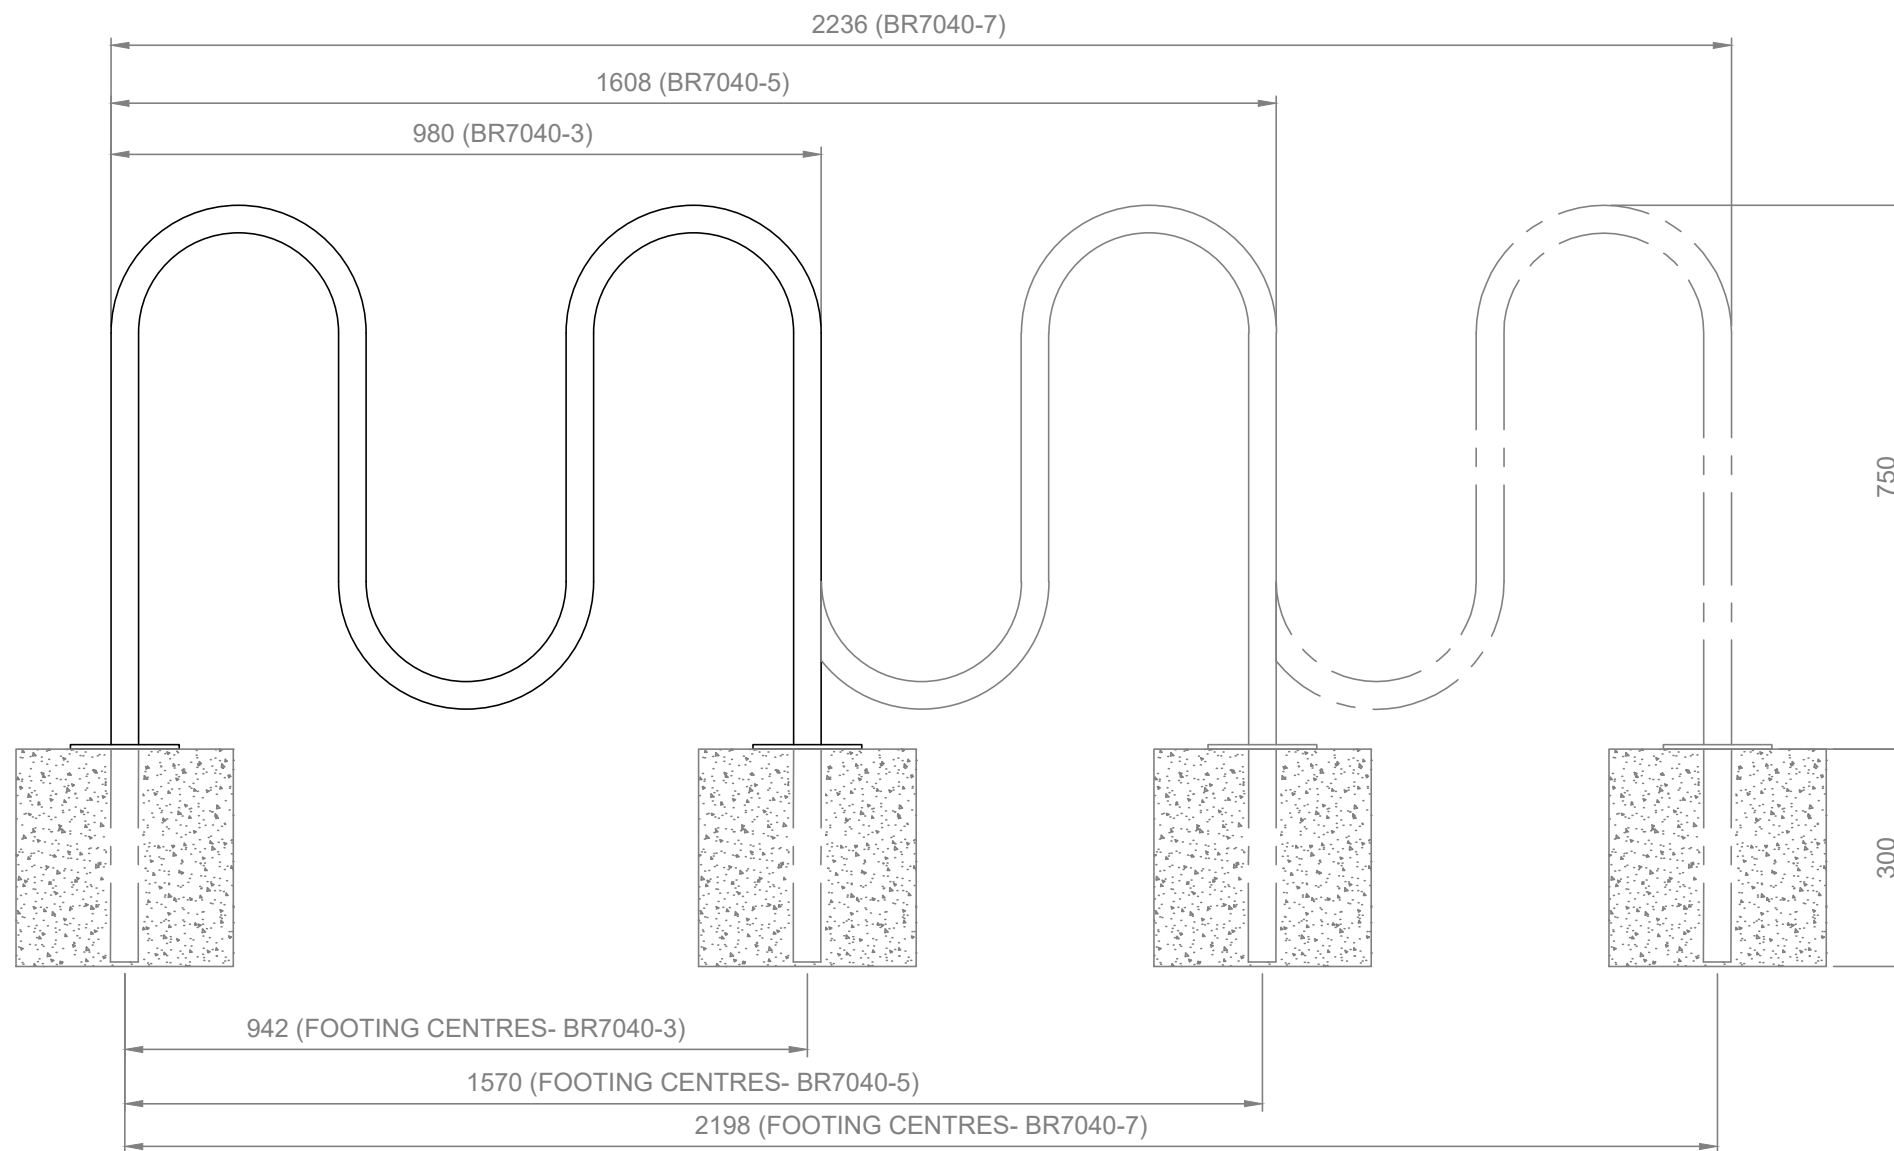

Commercial Systems Australia Pty. Ltd.

42 Orchard St, Kilsyth South, VIC  
 phone: (03) 9723 4111  
 fax: (03) 9723 3494  
 email: design@commercialsystems.com.au

Model Code: BR7040-  
 Model Description: Loop Bike Rack

**Drawing: CS0454**

Sheet Number: -  
 Sheet Description: Installation

Drawn By: GS  
 Date Drawn: 03.09.2009  
 Revision Number: 3

SCALE 1:1

ALL DIMENSIONS IN MILLIMETERS  
 UNLESS OTHERWISE STATED  
 ALL PARTS CENTRED UNLESS SPECIFIED

TOLERANCES

X	+/- 1mm
X.X	+/- 0.5mm
X.XX	+/- 0.05mm